

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200069704 A1

(54) Title
FIR filter and ramp-up/-down control circuit using the same

(51)⁷ International Patent Classification(s)
H03H 017/06 H03H 017/02

(21) Application No: 200069704

(22) Application Date: 2000.11.03

(30) Priority Data

(31) Number	(32) Date	(33) Country
11-313164	1999.11.04	JP

(43) Publication Date : 2001.05.10

(43) Publication Journal Date : 2001.05.10

(71) Applicant(s)
NEC Corporation

(72) Inventor(s)
Masahiko Nakayama

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001


BEST AVAILABLE COPY

FIR FILTER AND RAMP-UP/-DOWN CONTROL CIRCUIT USING THE SAME

ABSTRACT

5 An n-bit shift register (102) for shifting input data through successive bit stages and AND gates (103-i, i being 1 to n) corresponding to the bit stages of the shift register (102) are provided. A control circuit (101) feeds out control signals (107-i) for on-off controlling the feeding of the outputs of the corresponding bit stages of the shift register (102). Multipliers (104-i) multiply the on-off controlled data and predetermined filter
10 coefficient data, and an adder circuit (105) adds together the output of the multipliers to derive an FIR filter output including ramp-up and -down. A ramp-up/-down signal is fed to a shift register in the control circuit (101), and ramp-up data is derived from the output of the adder circuit (105). Thus, the circuit can be readily constructed without scale
15 increase.

FIG.1

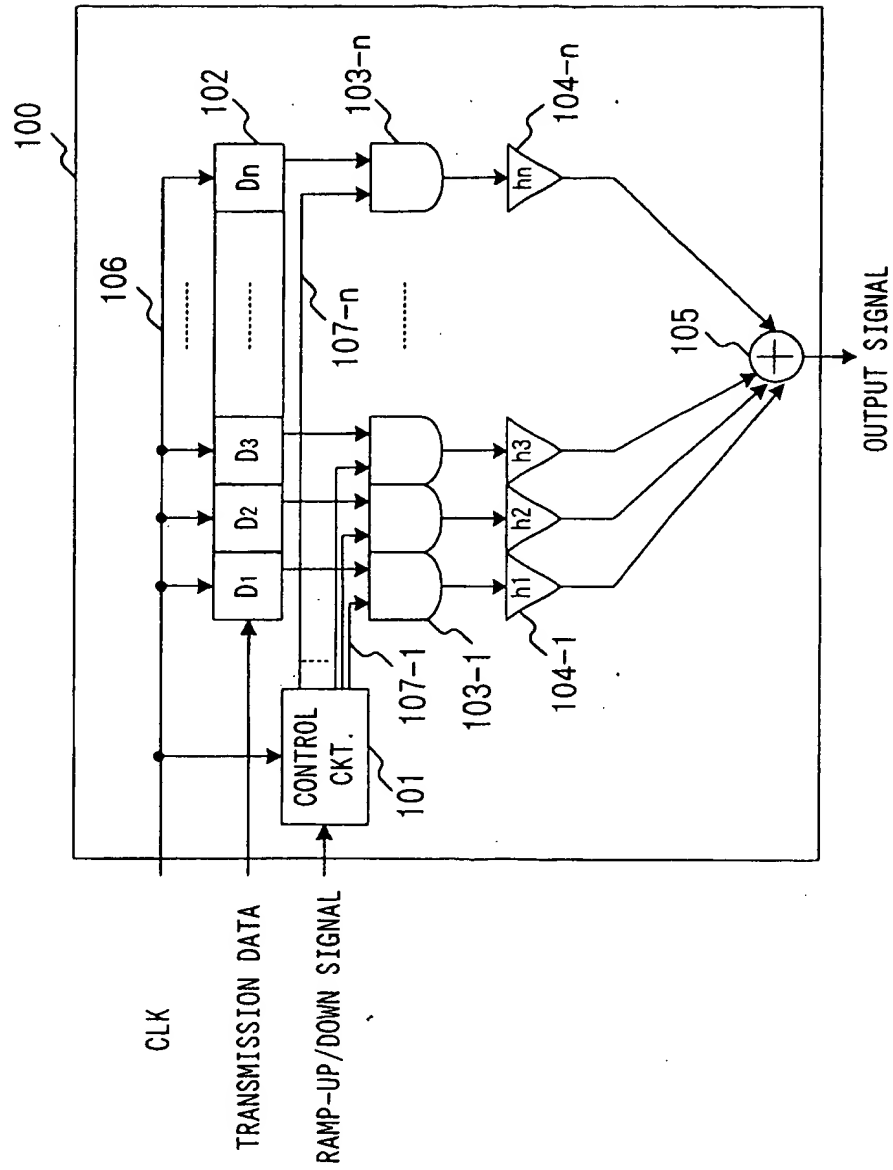

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name and Address of Applicant :	NEC Corporation 7-1, Shiba 5-chome Minato-ku Tokyo Japan
Actual Inventor(s):	Masahiko Nakayama
Address for Service:	Spruson & Ferguson St Martins Tower 31 Market Street Sydney NSW 2000
Invention Title:	FIR Filter and Ramp-up/-down Control Circuit Using the Same

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

FIR FILTER AND RAMP-UP/-DOWN CONTROL CIRCUIT USING THE
SAME

BACKGROUND OF THE INVENTION

The present invention relates to FIR (Finite
5 Impulse Response) filters and ramp-up/-down control
circuits using the same and, more particularly, to FIR
filters for controlling the transmission power level of
a transmission circuit in a radio transmitter/receiver
and ramp-up/-down control circuits using the same.

10 In the usual transmitter for performing CDMA (Code
Division Multiple Access) transmission, transmission
data is subjected to a digital signal processing circuit
to a digital signal process, and then subjected to frame
signal processing. The resultant transmission data is
15 subjected to spreading process. Thus obtained
transmission data is filtered in an FIR filter for
bandwidth limitation. In the FIR filter FIR coefficient
or data zero is produced on the basis of a control signal
produced from a ramp-up/-down signal which is
20 synchronized to the transmission data and represents the
time section of data to be transmitted.

Fig. 10 is a block diagram showing the general
construction of the transmitter for the CDMA
transmission. As shown in the Figure, a transmitter for
25 CDMA transmission comprises a digital part 121, an analog
part 122 and an antenna 123. The digital part 121
includes a digital signal processing circuit 12a for
performing digital signal processing (including a

spreading process) on transmission data, an FIR filter 12b for bandwidth limiting and a D/A converter 12c for converting digital data to analog signal. The analog part 122 has an LPF (filter) 12d, a modulator 12c, an IF amplifier 12f, a mixer 12g and an RF amplifier 12h.

As is well known in the art, in the transmitting for radio communication, at the start and end of transmission or at the time of burst transmission in time division transmission (including the case of packet transmission), the spectrum of the transmission signal is spread to have adverse effects on the transmitting operation. This is so because when transmission data rises sharply, the spectrum of the transmission signal is greatly spread at the rise time, thus causing frequency-wise interference with other channels. A similar problem arises even at the fall time of the transmission signal. Accordingly, it is prescribed as standard that a ramp-up and a ramp-down time sections are to be normally provided before and after effective transmission data.

Japanese Patent Laid-Open No. 8-46485 discloses a prior art means for solving the above problems. As shown in Fig. 11, the means comprises an n-bit shift register 301 constituted by n bit registers D1 to Dn, a memory 302 and a D/A converter 303. A signal of n bits outputted from the shift register 301 and a burst timing signal which is one-bit signal, constitute a sum bit (i.e., (n + 1)-bit) signal, which serves as address signal for the

memory 302. The memory 302 is of such a memory capacity which is called by $(n + 1)$ bits. The D/A converter 303 converts digital data outputted from the memory 302 to analog signal. An FIR filter can be realized by the above
5 construction.

The FIR filter shown in Fig. 11 performs an operation of reading out a filter output with a ramp-up and a ramp-down parts from the memory 302 under control of the burst timing signal. Therefore, when the tap
10 number (i.e., number of shift register stages) is increased, the memory capacity of the employed memory should also be increased, and therefore the circuit scale is increased.

It is conceivable to effect the ramp-up and -down
15 by controlling GCA (gain control amplifier) analog-wise in such a manner as providing level changes with provision of an output multiplier or providing a separate ramp-up/-down waveform generating circuit and adding a ramp-up/-down signal generated therein to the
20 transmission signal. Even such a method, however, has drawbacks that the power consumption and the circuit scales are increased, and cannot solve the above problems inherent in the prior art.

SUMMARY OF THE INVENTION

25 The present invention was made for the purpose of solving the above problems in the prior art, and it has an object of providing an FIR filter capable of easily realization of smooth ramp-up and -down without

increasing the circuit scale, and also a ramp-up/-down control circuit using the same FIR filter.

According to an aspect of the present invention, there is provided an FIR filter comprising a selection
5 control means for selecting input data, and a multiplying means for multiplying data selected by the selection control means and predetermined filter coefficient, wherein the FIR filter output is derived from the product output of the multiplying means.

10 According to another aspect of the present invention, there is provided an FIR filter comprising: a selection control means, for selecting input data, including a first n-bit shift register (n being natural
15 the successive stage bits, n switching means provided for the outputs of the n stage bits of the shift register, respectively, for on-off controlling the feed-out of the output of these stage bits, and a control means for on-off controlling the n switching means; and a multiplying
20 means for multiplying data selected by the selection control means and predetermined filter coefficient, wherein the multiplying means provided for the outputs of the n stage bits of the shift register for multiplying outputs fed out from the corresponding stage bits under
25 "on" control of the switching means by predetermined filter coefficients, respectively, and the FIR filter output being derived from the product outputs of the n multiplying circuits.

The control means is constituted by a second n-bit shift register for shifting a ramp-up/-down signal through the successive bit stages under control of a shift clock for the first n-bit shift register; and the n switch means are each an AND gate for receiving the outputs of the corresponding bit stages of the first and second n-bit shift registers as respective inputs.

The control means is a second n-bit shift register for shifting a ramp-up/-down signal on the basis of the shift clock signal of the first n-bit shift register; and the n switching means are n switches provided for the bit stages of the second n-bit shift register for selectively feeding out the filter coefficient data and zero data on the basis of the outputs of the corresponding bit stages.

The control means is a second n-bit shift register for shifting a ramp-up/-down signal through the successive bit stages under control of a shift clock signal for the first n-bit shift register, the outputs of the bit stages of the first n-bit shift register being reset on the basis of the outputs of the corresponding bit stage of the second n-bit shift register.

The FIR filter further comprises a means for changing the shift clock frequency of the first n-bit shift registers.

The shifting operation of the first and second n-bit shift registers are operated under control of shift clock signals at different frequencies.

According to other aspect of the present invention,
there is provided a ramp-up circuit comprising the FIR
filter according to claim 2 which includes an adder
circuit for adding together the outputs of the n
5 multiplying circuits, a ramp-up signal being fed to the
first n-bit shift register, the ramp-up data being
derived from the sum output of the adder circuit.

According to still other aspect of the present
invention, there is provided a ramp-down circuit
10 comprising the FIR filter according to claim 2 which
includes an adder circuit adding together the outputs
of the n multiplying circuit, a ramp-down signal being
fed to the first n-bit shift register, ramp-down data
being derived from the sum output of the adder circuit.

15 In the present invention, in an FIR filter usually
used in a radio transmitter for filtering a base-band
signal as transmission data, a ramping mechanism is
provided, which controls the power level of the
transmission data at the time of the start and end of
20 transmission by selecting the filter coefficient on the
basis of a ramp-up/-down signal.

Specifically, the feed-out of the output of each
of shift register stage is on-off controlled, each of
the on-off controlled transmission data is multiplied
25 in a multiplier by a predetermined filter coefficient
to derive an FIR filter output from product output thus
obtained, a ramp-up/-down signal is inputted to a shift
register in a control circuit, and ramp-up/-down data

is derived from the output of an adder circuit. No memory for storing any ramp-up/-down filter coefficient need be prepared. It is thus possible to realize smooth ramp-up and -down with a simple construction and without
5 circuit scale increase.

Other objects and features will be clarified from the following description with reference to attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 shows a ramp-up/-down control circuit using an FIR filter according to the present invention;

Fig. 2 shows an example of the internal construction of the control circuit 101 in Fig. 1;

15 Fig. 3 shows waveforms for explaining the operation of control circuit in Fig. 2;

Fig. 4 shows waveforms for explaining the operation of each unit in Fig. 1;

Fig. 5 shows a different embodiment employing switches in lieu of AND gate in Fig. 1;

20 Fig. 6 shows an exemplified circuit of the switch in Fig. 5;

Fig. 7 shows a further embodiment according to the present invention which resets each stage of the shift registers in Fig. 1;

25 Fig. 8 shows another ramp-up/-down control circuit using an FIR filter according to the present invention;

Fig. 9 shows waveform for explaining the operation of each unit in Fig. 8;

Fig. 10 shows a block diagram showing the general construction of the transmitter for the CDMA transmission; and

Fig. 11 shows a block diagram of prior art FIR filter.

PREFERRED EMBODIMENTS OF THE INVENTION

Preferred embodiments of the present invention will now be described with reference to the drawings. In the Figures to be referred to hereinafter, like parts are designated by like reference numerals.

Fig. 1 is a schematic representation of an embodiment of the ramp-up/-down control circuit using an FIR filter according to the present invention. Referring to the Figure, a ramp-up/-down control circuit 100 comprises a control circuit 101, a shift register 102 constituted by n bit registers D_1 to D_n , n AND gates 103-1 to 103- n , n multiplier circuits 104-1 to 104- n each for multiplying the output of each of the AND gates 103-1 to 103- n and an FIR coefficient of the FIR filter, and an adder 105 for adding together the outputs of the multiplier circuits 104-1 to 104- n .

Transmission data to be transmitted is inputted to the bit register D_1 of the shift register 102, while clock signal (CLK) 106 is inputted to each of the bit registers D_i (i being 1 to n) of the shift register 102. The bit registers D_i (i being 1 to n) are connected to one another such that the transmission data inputted to the bit register D_1 is progressively shifted from the bit

register D1 through the bit registers D2, D3, ... to the bit register Dn under control of the clock signal 106. The bit registers Di of the shift register 102 each have an output tap, and transmission data are progressively
5 outputted from the taps to the corresponding AND gates 103-1 to 103-n.

The ramp-up/-down signal is synchronized to the transmission data. This signal is inputted to the control circuit 101. The control circuit 101 performs
10 signal processing for the ramp-up and -down. Control signals 107-1 to 107-n which are obtained after the signal processing, are inputted to the AND gates 103-1 to 103-n, respectively. The clock signal 106 is also inputted to the control circuit 101, which is operated under control
15 of system clock.

An example of the internal construction of the control circuit 101 will now be described with reference to Fig. 2. Referring to the Figure, the control circuit 101 includes a shift registers 101 comprising n bit
20 registers 101-1 to 101-n which receives a ramp-up/-down signal and progressively shifts the input signal at shift timings on the basis of the clock signal. The individual bit registers 101-1 to 101-n output respective control signals 107-i (i being 1 to n). It will be seen that the
25 control circuit 101 performs well-known serial-to-parallel conversion of the inputted ramp-up/-down signal.

As shown in Fig. 3, in a ramp-up time section, with

input of the ramp-up signal to the control circuit 101 in synchronism to the clock signal, the n bits C1 to Cn of the control signal output are progressively inverted from "0" to "1" from the least significant bit C1. Thus, 5 the ramp-up signal is provided in the form of parallel data of the n bits C1 to Cn. The n bits C1 to Cn are finally all inverted to "1".

On the other hand, in a ramp-down time section, with input of the ramp-down signal in synchronism to the clock signal, the n bits C1 to Cn are progressively inverted from "1" to "0" from the least significant bit C1. Thus, 10 the ramp-down signal is obtained in the form of parallel data of the n bits C1 to Cn. In this case, the n bits C1 to Cn are finally all inverted to "0".

15 The control signals 107-i (i being 1 to n) from the control circuit 101 and transmission data from the taps of the shift register 102 are inputted to the corresponding AND gates 103-i (i being 1 to n), and the outputs therefrom are produced after being multiplied 20 in the multiplier circuits 104-i (i being 1 to n) by FIR coefficients h1 to hn, respectively. The product data obtained by multiplication by the FIR coefficients are added together as transmission data in the adder 105, and the sum data thereof is outputted.

25 The output signal at instant t from the adder 105 is given as:

$$y_t = h_1 \cdot x_t + h_2 \cdot x(t-1) + \dots + h_n \cdot x(t-n)$$

$$= \sum_{k=1}^i \{h_k \cdot x(t-k)\}$$

Where x_t represents the transmission data at instant t .

It is assumed that the multiplier circuits 104-
 i are each constituted by a circuit for generating the
 5 FIR coefficient h_i ($i = 1$ to n) and a multiplier for
 multiplying the generated FIR coefficient and
 transmission data by each other. With this construction
 of the FIR filter, the output signal from the ramp-
 up/-down control circuit 100 actually subsequently
 10 passes through an D/A converter, a modulator circuit and
 an analog transmission circuit which outputs power
 amplified radio wave. These subsequent stage circuits
 are well known to the person skilled in the art and also
 has no direct bearing on the present invention, so that
 15 they are not described in detail.

Fig. 4 is a waveform chart showing waveforms after
 filtering, obtained by simulation of the ramp-up/-down
 control circuit using the FIR filter. As shown in the
 Figure, the ramp-up/-down signal is synchronized to the
 20 transmission data. The ramp-up/-down signal is inverted
 from "Low" level to "Hi" level simultaneously with the
 start of data transmission, and is inverted from "Hi"
 level to "Low" level simultaneously with the end of data
 transmission. It is assumed that the transmission data,
 25 the ramp-up/-down signal and the clock signal are
 synchronized to each other.

In an initial stage prior to the start of

transmission, the ramp-up/-down signal is at "Low" level. At this time, the control signals 107-i from the control circuit 101 are all at "Low" level.

With the start of transmission, the ramp-up/-down signal is inverted to "Hi" level, and the control signals from the control circuit 101 are progressively inverted from "Low" level to "Hi" level under control of the clock signal 106. It will be seen that, as noted before, the control circuit 101 thus performs serial-to-parallel conversion.

With the end or stop of transmission, i.e., with inversion of the ramp-up/-down signals from "Hi" to "Low" level, the control signals 107-i from the control circuit 101 are similarly progressively inverted from "Hi" to "Low" level under control of the clock.

Referring again to Fig. 1, the shift register 102 is an n-bit shift register operable under control of the clock signal 106. In synchronism to the rise timing of the clock signal 106 the shift register 102 stores the first bit of the transmission data in its first bit register D1, and in synchronism to the next clock signal rise timing it shifts the transmission data stored in the bit register D1 to the next bit register D2. At this time, the next bit of transmission data is stored in the bit register D1. Likewise, in synchronism to every rise timing of the clock signal inputted thereto, the shift register 102 shifts the transmission data by one bit.

The shift register 102 also outputs transmission

data from its taps, and the outputted transmission data are inputted together with the control signals 107-i from the control circuit 101 to the AND gates 103-i, respectively. When control signal 107-i from the control circuit 101 is at "Low" level, the output of the corresponding AND gate 103-i is at "Low" level (i.e., zero). When the control signal 107-i is at "Hi" level, on the other hand, the AND gate 103-i directly passes the data value of the transmission data.

The operation of the ramp-up/-down control circuit at the times of (a) start of transmission, (b) steady-state transmission and (c) end of transmission, will now be described with reference to Fig. 4.

(a) Start of transmission:

At the time of the start of transmission, the control signals 107-i from the control circuit 101 are progressively inverted from "Low" level to "Hi" level in synchronism to the clock signal. The transmission data, which have all been zero at the outset, are progressively multiplied by the filter coefficients 104, i.e., h_1 to h_n , and then added together in synchronism to the clock signal. Thus, as shown in Fig. 4, in a ramp-up time section the output power level (or amplitude) is smoothly increased on the basis of the filter characteristic. The length or interval of the ramp-up time section is determined by the size (i.e., number of bits) of the shift register 102. Usually in a symmetrical n-tap FIR filter the length of the ramp-up

time section is $n/2 \times \text{CLK}$.

(b) Steady-state transmission:

In the state with the ramp-up/-down signal held at "Hi" level (i.e., during transmission), the control
5 signals 107-i from the control circuit 101 are all at "Hi" level. Thus, like the usual FIR filter operation the transmission data from the taps of the shift register 102 are multiplied by the respective FIR filter coefficients 104, and the products are added together
10 in the adder 105 to obtain an output signal, which is outputted as FIR filtered transmission data. In Fig. 4, the state during the transmission is shown as transmission data time section.

The Fig. 4 shows an example in the case when the
15 transmission data is the recurrence of "1, -1". The normal transmission data is of a given data series, and also its transmission time interval is based on a transmission format. The actual waveform is thus different from the waveform shown in Fig. 4.

20 (c) Stop of transmission:

In the ramp-down case, from the state with the control signals 107-i from the control circuit 101 all at "Hi" level (i.e., state during transmission) the ramp-up/-down signal is inverted from "Hi" to "Low" level.
25 Thus, the converse operation to that at the time of the start of transmission is brought about, that is, the control signals 107-i are progressively inverted from "Hi" to "Low" level. Thus, the product result of

multiplication by each filter coefficient corresponding to each control signal 107-i at "Low" level becomes zero, and the sum result is progressively reduced. The transmission power level is thus progressively
5 reduced. Consequently, the output power level (i.e., amplitude) is smoothly reduced on the basis of the filter characteristic in a ramp-down time section as shown in Fig. 4.

Fig. 4 shows a simulation waveform obtained with
10 transmission data recurrence of {1, -1} by constituting the shift register with 16 bit registers and operating each bit register with four clock pulses (i.e., a filtering example with four times over-sampling and 64-tap FIR).

15 It will be seen from the above description that it is possible to obtain the ramp-up/-down control by merely adding the control circuit 101 and the AND gates 103-i to the usual FIR filter circuit. In other words, it is possible to construct a ramp-up/-down control circuit
20 without incorporating any memory or complicated control circuit.

While a usual FIR filter construction has been described above, the method of producing the FIR filter coefficients and so forth are not described in detail.
25 The FIR filter coefficients may be generated by a fixed circuit, or they may be taken out from a memory. In addition, while the AND gates are used for on-off controlling the ANDs of the transmission data and the

filter coefficients, it is obvious that the same effects are obtainable by replacing the AND gates with switches.

Fig. 5 shows a different embodiment employing switches. Specifically, referring to the Figure, this
5 embodiment uses switch circuits 108-1 to 108-n in lieu of the AND gates 103-i in Fig. 1. As shown in Fig. 6, each switch circuit 108-i (i being 1 to n) each includes a circuit 83 for producing a fixed value C_i (i being 1 to n), a circuit 82 for producing an FIR filter
10 coefficient h_i (i being 1 to n), a switch 81 on-off controlled by the control signal 107-i to selectively produce the output of either circuit 83 or 82, and a multiplier 80 for multiplying a signal selected by the switch and the output signal from the corresponding bit
15 register of the shift register 102 by each other. The same effects are thus obtainable by replacing the AND gates with the switches.

Fig. 7 shows a further embodiment. In this
embodiment, neither AND gates nor switches are used.
20 Instead, the bit registers of the shift register 102 are reset individually on the basis of the outputs of the bit registers of the shift register in the control circuit 10, respectively. By resetting the bit registers of the shift register 102, it is possible to select one of two
25 states, i.e., inputting the transmission data as such or zero to the multiplier. The same effects as in the case of using the AND gates or the switches are thus obtainable.

As shown above, according to the present invention the ramp-up and -down are realized without producing transmission data at the ramp-up and -down times by switching a plurality of FIR filter coefficients stored in a memory or effecting the ramp-up and -down by controlling GCA analog-wise as in the prior art but by using FIR filter coefficients at the time of the usual transmission.

In the meantime, in a portable telephone set or the like which should maintain high frequency utilization efficiency, unless the ramp-up of transmission power level at the time of the start of transmission and the ramp-down at the time of the stop of transmission are performed smoothly, spurious data may be generated to interfere with other channels. Particularly in such case as burst transmission, at which time the transmission is frequently started and stopped, it is necessary to have a mechanism which is less subject to spurious data generation. This embodiment of the ramp-up/-down control circuit utilizing the FIR filter coefficients, is theoretically less subject to the spurious data generation. Besides, this embodiment uses neither numbers of memories and multiplies nor exclusive waveform generating means. It is thus possible to simplify the construction and also reduce the circuit scale.

While the cases of inputting a ramp-up and a -down signal have been described, it will be obvious that the

present invention is also applicable to the case of inputting either one of the ramp-up and -down signals.

A further embodiment of the present invention will be described with reference to Figs. 8 and 9. This
5 embodiment is different from the above embodiments in that it permits control of the ramp-up and -down time sections.

In many cases, the ramp-up and -down time sections are prescribed in the pertinent radio communication
10 system. Usually, it is desirable that spurious data is less generated and that it is possible to promptly start and stop transmission (i.e., provide the ramp-up and -down time sections). From the standpoint of evaluation of the characteristics of the system itself, it seems
15 to be more convenient if it is possible to change the ramp-up and -down time sections. An embodiment in such a case will now be described with reference to Fig. 8.

Referring to the Figure, the difference of this circuit from the circuit shown in Fig. 1 resides in that
20 it is possible to change the length of the ramp-up and -down time sections by adequately using the clock signal. A main structural difference resides in that the clock used in the ramp-up/-down circuit 110 is generated in control circuit 111.

25 In addition, base system clock signal SYS_CLK is fed to the control circuit 111 and also to a D/A converter 118.

Fig. 9 is a waveform chart showing an example of

the relationship of system clock signal SYS_CLK, clock signal 116, transmission data and ramp-up/-down signal. Referring to the Figure, the clock signal 116 generated in the control circuit 111 is changed only in the ramp-up and -down time sections. In this case, the frequency is doubled in a time section corresponding to one half the number of bit shift registers or the number of taps. The generated clock signal 116 is fed to the shift register 102, and the shift register 102 is thus operated at timings under control of the clock signal 116. Also, at these timings the control signal 107-i fed out from the control circuit 111 is changed. In other words, the two shift registers are operated under control of different shift clocks.

Referring back to Fig. 8, the system clock signal SYS_CLK is fed to the D/A converter 118. Thus, the ramp-up/-down circuit 110 is operated differently in the ramp-up and -down time sections, and the same output time extension is obtained by the ratio between the clock signal 116 and the system clock signal SYS_CLK. It is thus possible to change the total time of the ramp-up and -down time sections. The ratio between the clock signal 116 and system clock SYS-CLK can be readily changed as 2^n , and it is thus possible to set various ramp-up and -own time sections.

As has been described in the foregoing, according to the present invention at the times of the ramp-up and -down the transmission data or coefficient data is

selected by using the FIR filter, which limits bandwidth of the base-band. It is thus possible to easily realize smooth ramp-up and -down without increasing the circuit scale.

- 5 Changes in construction will occur to those skilled in the art and various apparently different modifications and embodiments may be made without departing from the scope of the present invention. The matter set forth in the foregoing description and
- 10 accompanying drawings is offered by way of illustration only. It is therefore intended that the foregoing description be regarded as illustrative rather than limiting.

The claims defining the invention are as follows:

~~What is claimed is:~~

1. An FIR filter comprising a selection control means for selecting input data, and a multiplying means for multiplying data selected by the selection control means and predetermined filter coefficient, wherein the FIR filter output is derived from the product output of the multiplying means.

2. An FIR filter comprising:

a selection control means, for selecting input data, including a first n-bit shift register (n being natural number for progressively shifting the input data through the successive stage bits, n switching means provided for the outputs of the n stage bits of the shift register, respectively, for on-off controlling the feed-out of the output of these stage bits, and a control means for on-off controlling the n switching means; and

a multiplying means for multiplying data selected by the selection control means and predetermined filter coefficient,

wherein the multiplying means provided for the outputs of the n stage bits of the shift register for multiplying outputs fed out from the corresponding stage bits under "on" control of the switching means by predetermined filter coefficients, respectively, and the FIR filter output being derived from the product outputs of the n multiplying circuits.

3. The FIR filter according to claim 2, wherein:
the control means is constituted by a second n-bit shift register for shifting a ramp-up/-down signal through the successive bit stages under control of a shift clock for the first n-bit shift register; and

the n switch means are each an AND gate for receiving the outputs of the corresponding bit stages of the first and second n-bit shift registers as respective inputs.

4. The FIR filter according to claim 2, wherein:
the control means is a second n-bit shift register for shifting a ramp-up/-down signal on the basis of the shift clock signal of the first n-bit shift register; and

the n switching means are n switches provided for the bit stages of the second n-bit shift register for selectively feeding out the filter coefficient data and zero data on the basis of the outputs of the corresponding bit stages.

5. The FIR filter according to claim 2, wherein the control means is a second n-bit shift register for shifting a ramp-up/-down signal through the successive bit stages under control of a shift clock signal for the first n-bit shift register, the outputs of the bit stages of the first n-bit shift register being reset on the basis of the outputs of the corresponding bit stage of the second n-bit shift register.

6. The FIR filter according to claim 2, which further comprises a means for changing the shift clock frequency of the first n-bit shift registers.

7. The FIR filter according to claim 2, in which the shifting operation of the first and second n-bit shift registers are operated under control of shift clock signals at different frequencies.

8. A ramp-up circuit comprising the FIR filter according to claim 2 which includes an adder circuit for adding together the outputs of the n multiplying circuits, a ramp-up signal being fed to the first n-bit shift register, the ramp-up data being derived from the sum output of the adder circuit.

9. A ramp-down circuit comprising the FIR filter according to claim 2 which includes an adder circuit adding together the outputs of the n multiplying circuit, a ramp-down signal being fed to the first n-bit shift register, ramp-down data being derived from the sum output of the adder circuit.

10. A FIR filter substantially as herein described with reference to any one of the embodiments illustrated in Figs. 1 to 9 of the accompanying drawings.

11. A ramp-up circuit substantially as herein described with reference to any one of
5 the embodiments illustrated in Figs. 1 to 9 of the accompanying drawings.

12. A ramp-down circuit substantially as herein described with reference to any one of the embodiments illustrated in Figs. 1 to 9 of the accompanying drawings.

10

DATED this Second Day of November, 2000

NEC Corporation

Patent Attorneys for the Applicant

SPRUSON & FERGUSON



03 11 00 09:00

FIG.1

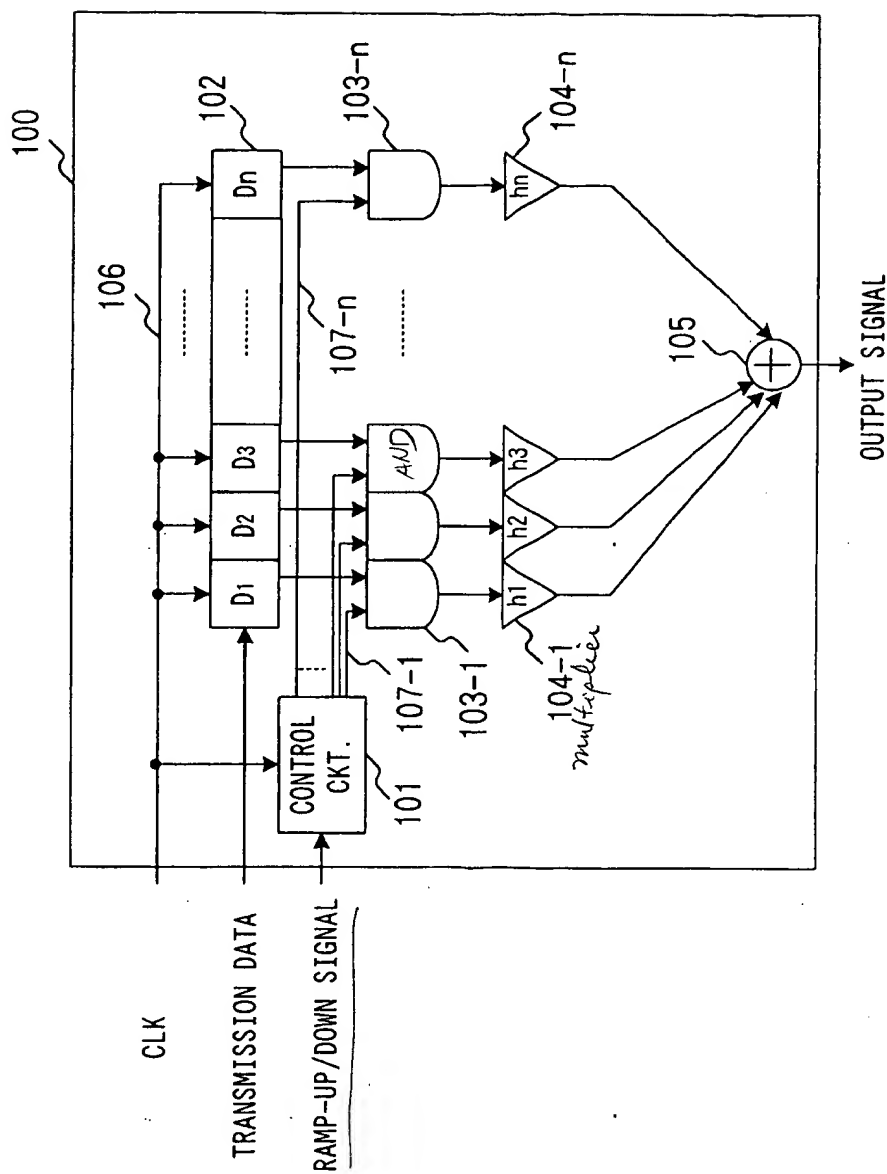


FIG.2

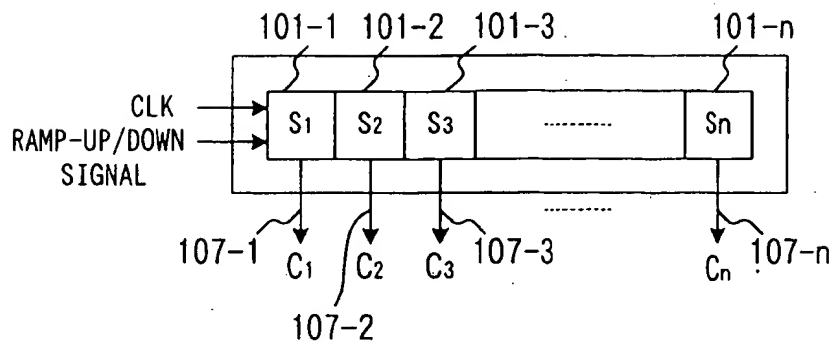


FIG.3


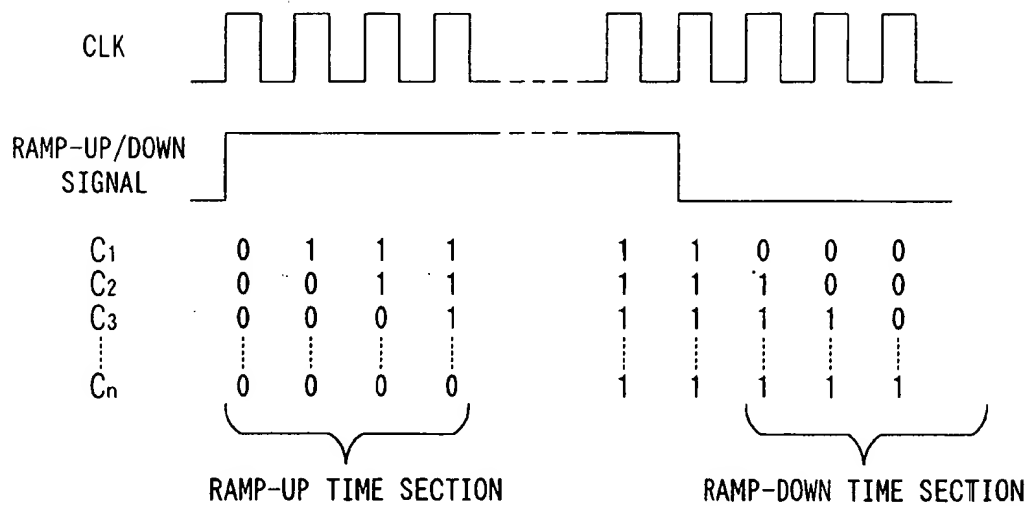


FIG. 4

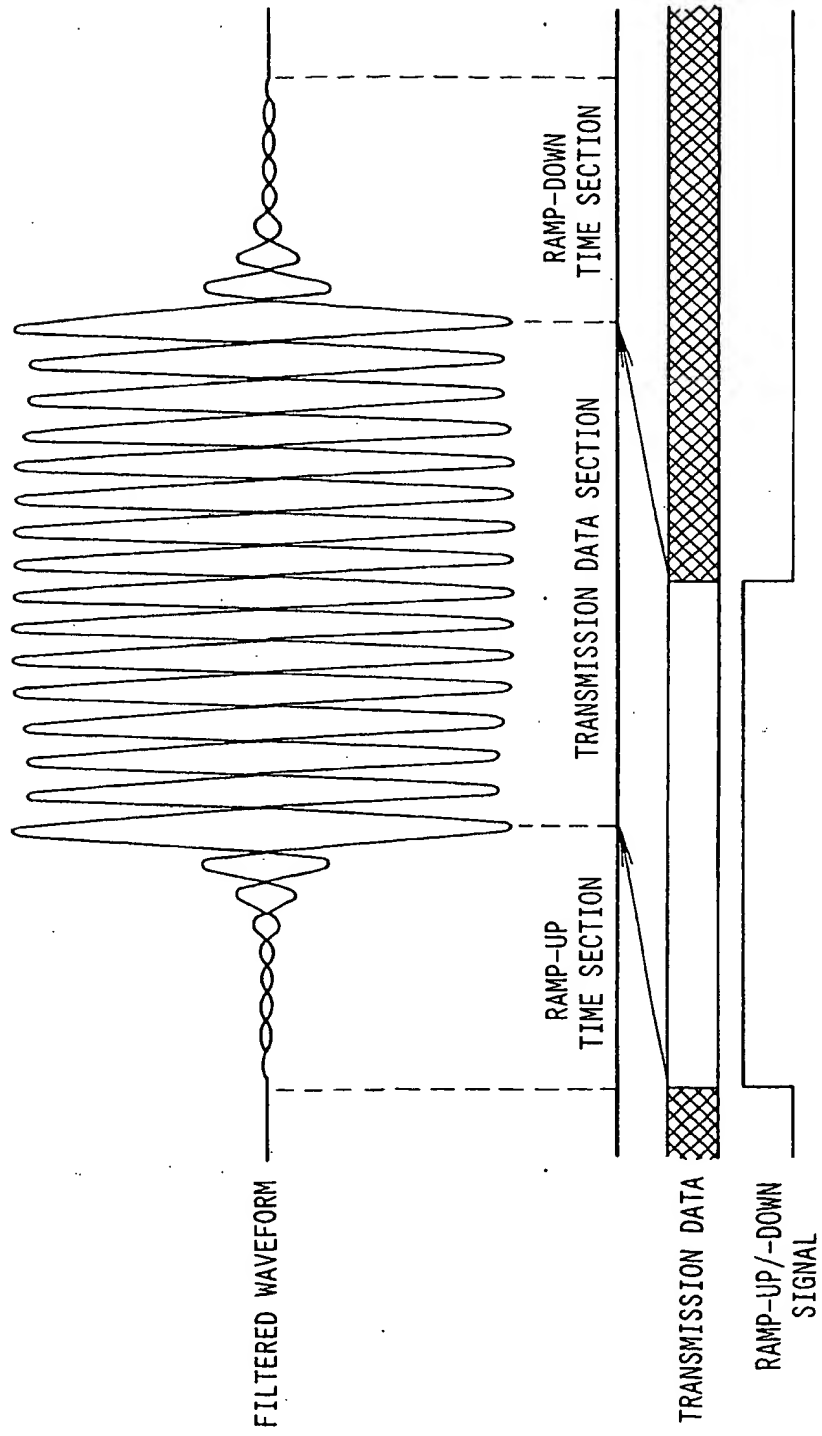

03 11 00 0004

FIG.5


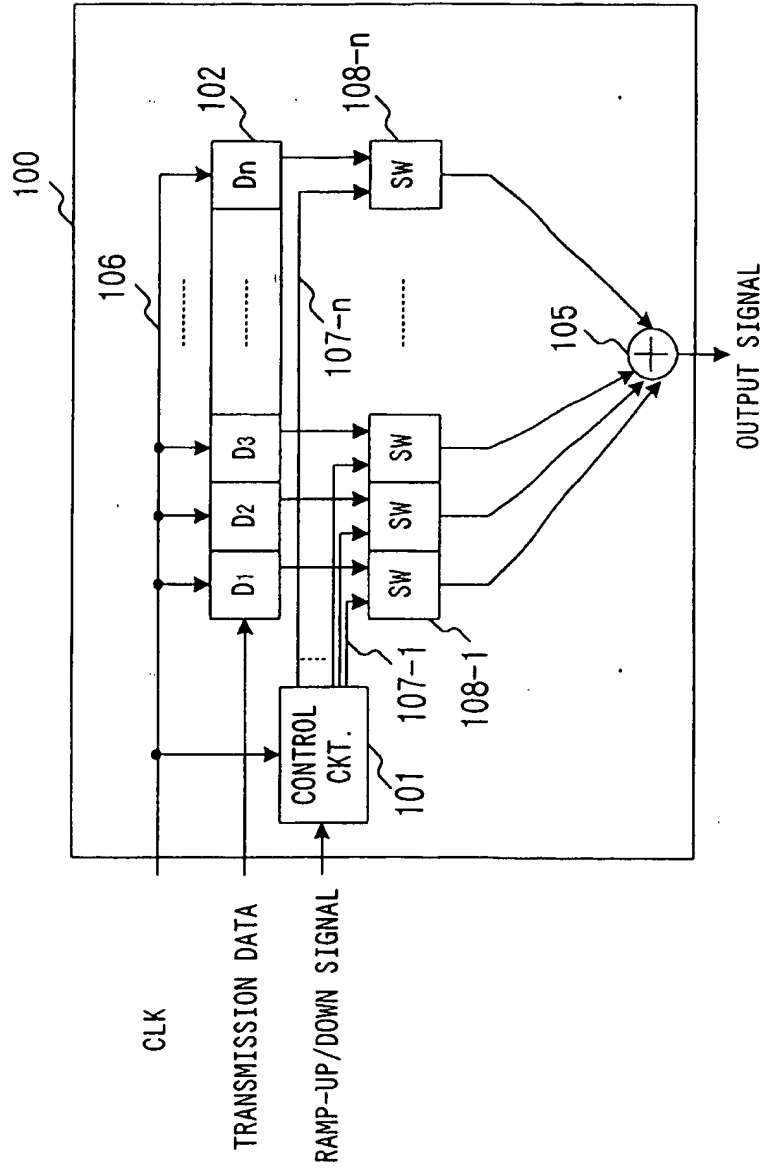


FIG. 6

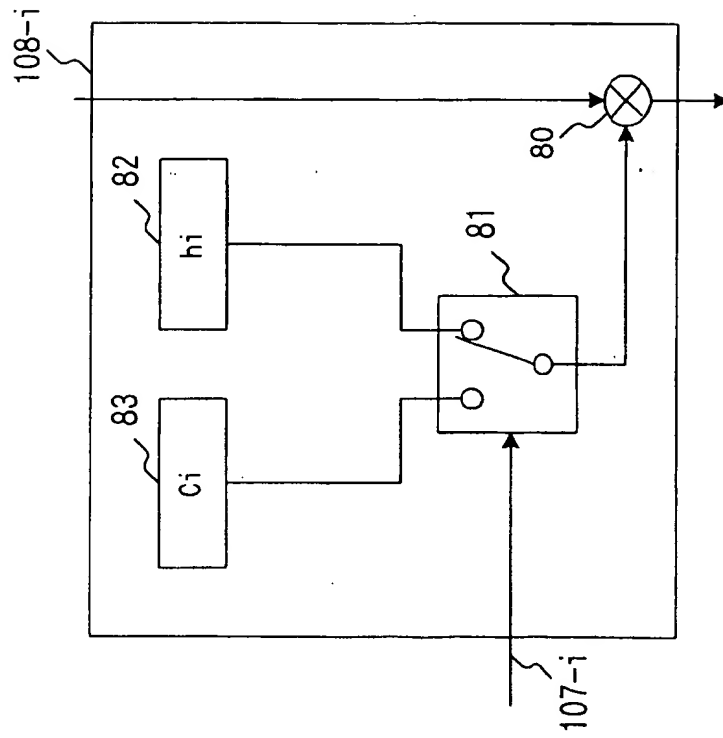

03 11 00 0000

FIG. 7


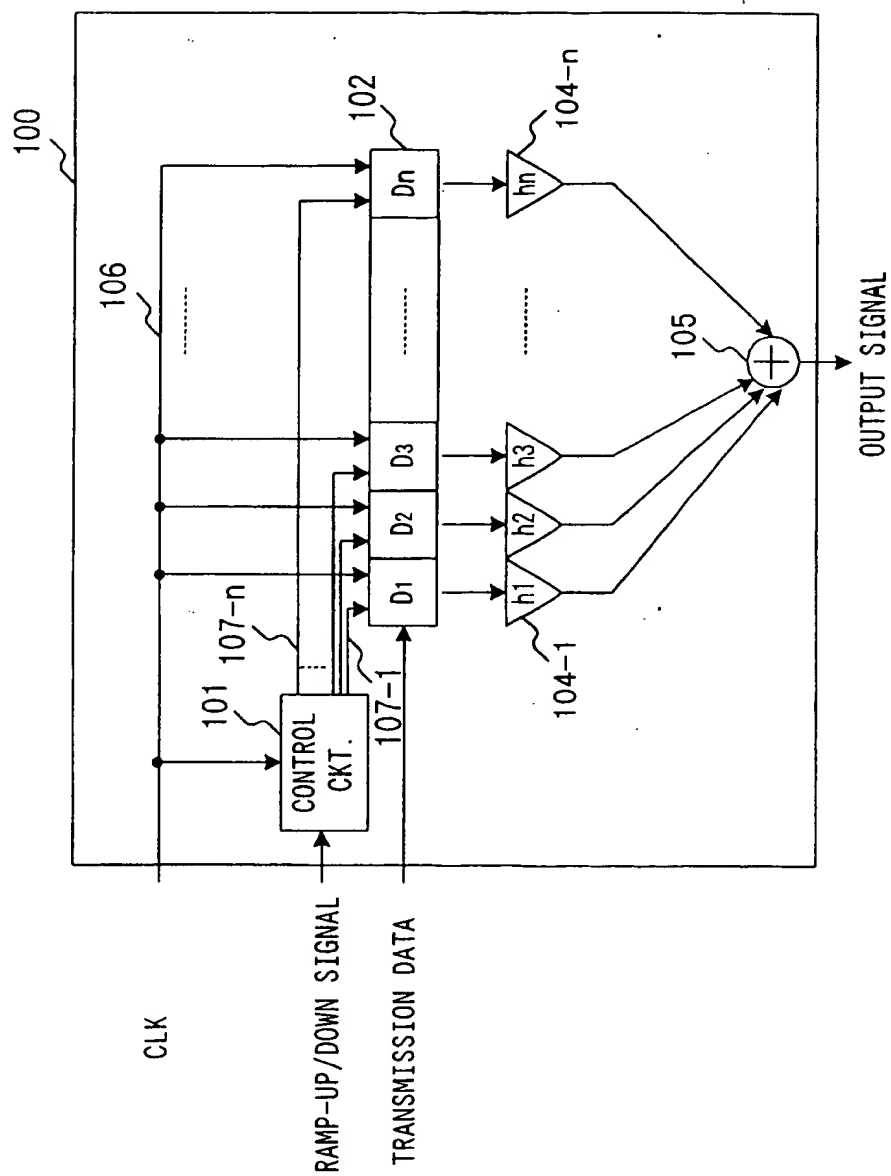



FIG.8

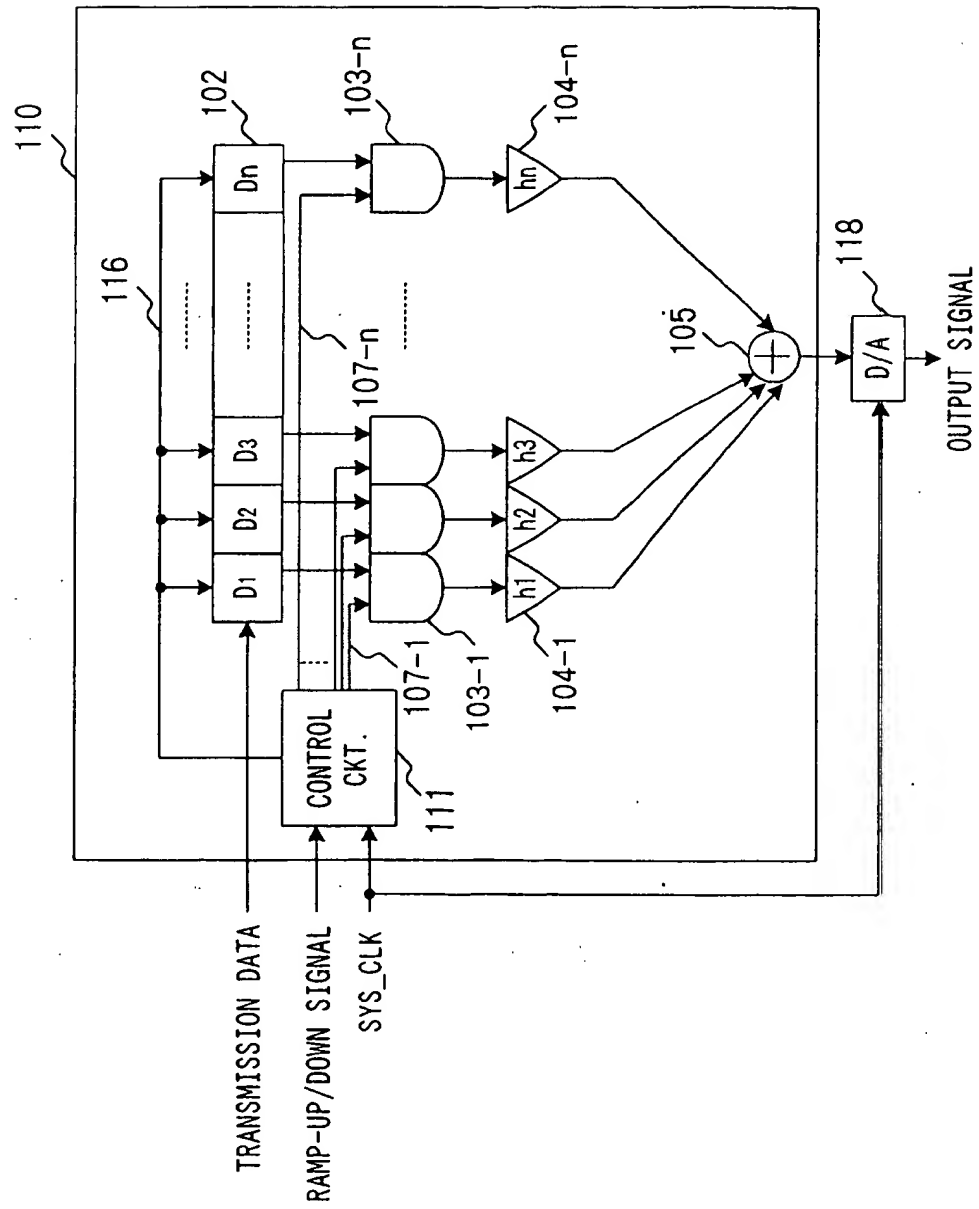

03 11 00 09704


8/10

FIG.9

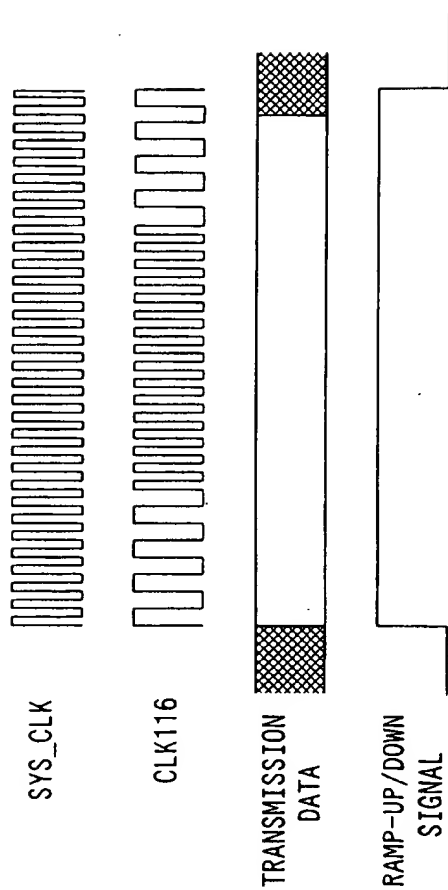


03 11 00 0000

FIG.10

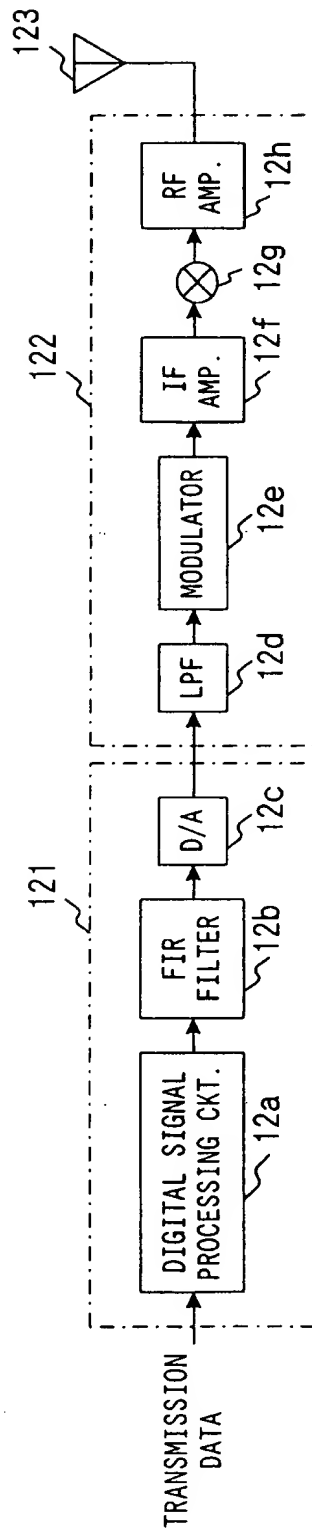

03 11 00 09:09

FIG.11

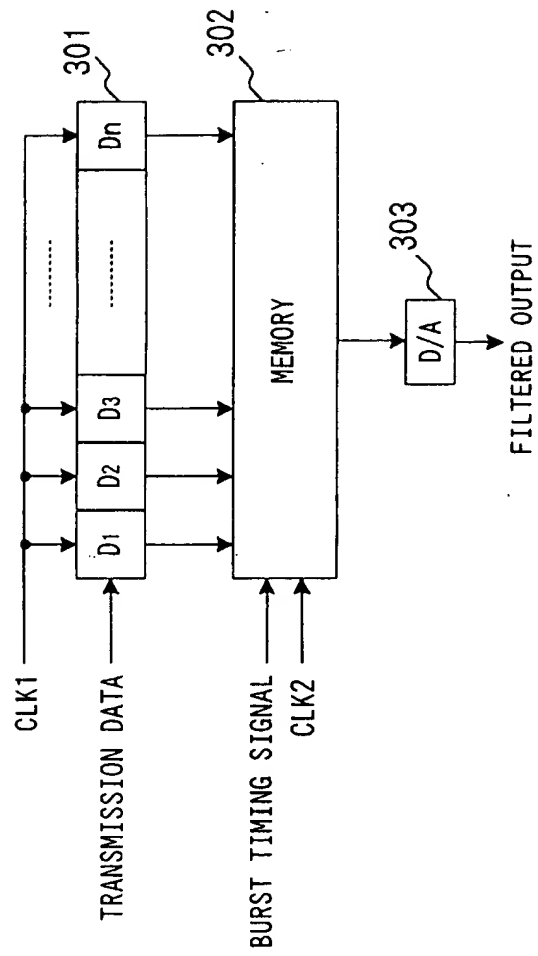Prior art

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.